

G2E160-AY47-01

AC centrifugal fan

forward curved, single inlet

with housing (flange), for solid fuel heating systems



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142



Nominal data

| | | | |
|-------------------------------|-------------------|------|------|
| Type | G2E160-AY47-01 | | |
| Motor | M2E068-EC | | |
| Phase | | 1~ | 1~ |
| Nominal voltage | VAC | 230 | 230 |
| Frequency | Hz | 50 | 60 |
| Type of data definition | | fa | ml |
| Valid for approval / standard | | CE | CE |
| Speed | min ⁻¹ | 2100 | 2100 |
| Power input | W | 240 | 280 |
| Current draw | A | 1.05 | 1.23 |
| Motor capacitor | µF | 6 | 6 |
| Capacitor voltage | VDB | 400 | 400 |
| Min. back pressure | Pa | 0 | 50 |
| Min. ambient temperature | °C | -25 | -25 |
| Max. ambient temperature | °C | 50 | 30 |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

| | | | | | |
|-----------------------|--------|--------------------------------|--------|--------------|--------------|
| Installation category | A | Overall efficiency η_{es} | Actual | Request 2013 | Request 2015 |
| Efficiency category | Static | Efficiency grade N | 27.4 | 25.6 | 32.6 |
| Variable speed drive | No | Power input P_e | 38.8 | 37 | 44 |
| Specific ratio* | 1.01 | Air flow q_v | 0.16 | | |
| | | Pressure increase p_{fs} | 365 | | |
| | | Speed n | 442 | | |
| | | | 2595 | | |

Data established at point of optimum efficiency

Distributed By:



Freephone 0508 634 341 | Fax 09 634 7417

7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand



G2E160-AY47-01

AC centrifugal fan

forward curved, single inlet

with housing (flange), for solid fuel heating systems

Technical features

| | |
|--|---|
| Mass | 4 kg |
| Size | 160 mm |
| Material of impeller | Sheet steel, galvanised |
| Housing material | Die-cast aluminium |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 44; Depending on installation and position |
| Insulation class | "B" |
| Humidity class | F0 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Any |
| Condensate discharge holes | None |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Variable |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 60335-1; CE |
| Approval | CCC |

Distributed By:

ARGON
DISTRIBUTORS LTD

Freephone 0508 634 341 | Fax 09 634 7417

7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand




AC centrifugal fan

forward curved, single inlet

with housing (flange), for solid fuel heating systems

Charts: Air flow 50 Hz

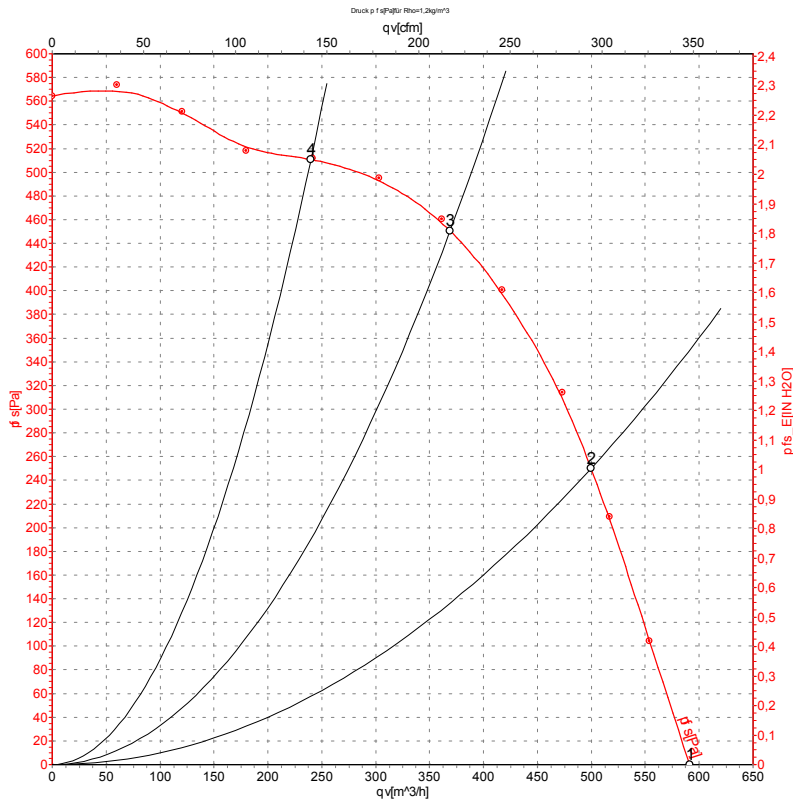

Measurement: LU-104987

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 50 | 2100 | 240 | 1.05 | 590 | 0 |
| 2 | 230 | 50 | 2375 | 200 | 0.87 | 500 | 250 |
| 3 | 230 | 50 | 2585 | 164 | 0.71 | 370 | 450 |
| 4 | 230 | 50 | 2715 | 137 | 0.59 | 240 | 510 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

Distributed By:



Freephone 0508 634 341 | Fax 09 634 7417

7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand




AC centrifugal fan

forward curved, single inlet

with housing (flange), for solid fuel heating systems

Charts: Air flow 60 Hz

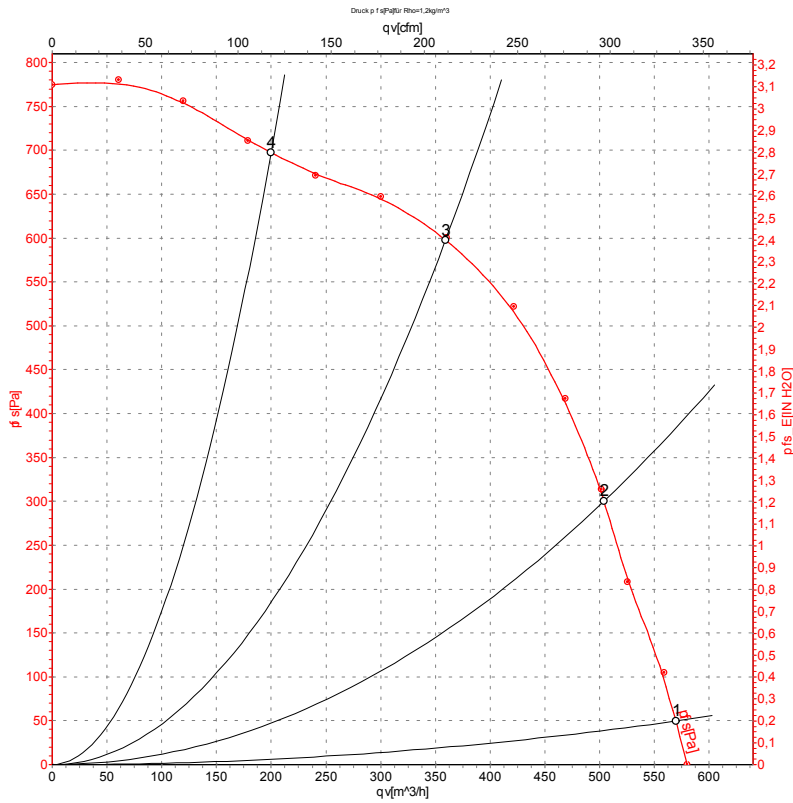

Measurement: LU-104989

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 60 | 2100 | 280 | 1.23 | 570 | 50 |
| 2 | 230 | 60 | 2500 | 258 | 1.12 | 505 | 300 |
| 3 | 230 | 60 | 2940 | 210 | 0.94 | 360 | 600 |
| 4 | 230 | 60 | 3180 | 172 | 0.80 | 200 | 700 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

Distributed By:



Freephone 0508 634 341 | Fax 09 634 7417

7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand

